

# Line Interactive UPS, 1500VA/900W + Battery



**Kode** : Plus5L-U1500G(B)

**Kategori** : APlus UPS System

**Harga** : Rp 1.585.000,00

Plus5L-U1500G adalah produk dari APlus UPS System dengan rating 1500VA/900Watt dan memiliki desain "Easy Battery Replacement". Desain ini memungkinkan pengguna untuk mudah melakukan maintenance atau mengganti battery jika sudah lemah.

**\*Penjualan produk ini termasuk battery**

**\*Pengiriman hanya jalur darat dan area pulau jawa**

**\*Garansi untuk battery adalah 6 bulan**

## Features :

- Controlled by a technologically advanced microprocessor guaranteeing high reliability
- Equipped with 2-steps boost & 1-step buck AVR to stabilize output voltage
- USB port and monitor software is designed to manage UPS status via PC (Optional)
- Built-in DC start function enables UPS to be started without AC power supplied
- Constant current, constant voltage battery charger (CCCV Battery Charger)
- UPS will charge itself even though power switch is off (Off mode charging)
- UPS will shut down upon battery low ; UPS will restart automatically upon AC recovery (Auto-restart)
- Over / under voltage protection (UPS will go to battery mode)
- Easy replacement battery design
- Lightning / surge protection 175 joules

## Battery Type :


- VRLA 12V/9AH or VRLA 12V/7.2AH
- 2 pcs
- **Battery dimension 151 x 65 x 100 mm**

## Backup Time (estimated) :

LOAD	9AH Battery	7.2AH Battery
900 Watt	10 Minutes	8 Minutes
700 Watt	12 Minutes	10 Minutes
500 Watt	18 Minutes	14 Minutes

## Easy Battery Replacement and Installation :

### Intelligent Battery Door Design:

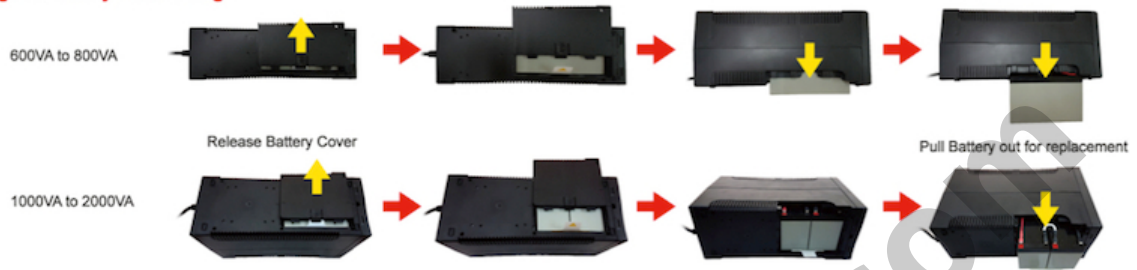

## Manual :

[UPS-Aplus-Plus5L.pdf](#)

## Specification :

<b>INPUT</b>	
Voltage	110/115/120Vac or 220V/230/240Vac
Voltage Range	-30% +25%
Frequency	50Hz or 60Hz (Auto-Sensing)
<b>OUTPUT</b>	
Voltage Regulation	AC Mode / Battery normal : 110/115/120Vac or 220/230/240Vac +/- 10%
Frequency	AC mode: 47-53Hz for 50Hz or 57-63Hz for 60Hz; Battery mode: 50Hz or 60Hz +/- 1Hz
Waveform	Simulated Sinewave
Transfer Time	< 6ms(Typical)
Outlet: IEC-320 C13*2pcs + Schuko*4pcs	6pcs with backup/AVR/Surge protected
<b>BATTERY</b>	
Voltage	24VDC
Type	12V/9AH*2pcs
Recharge Time	5 hours to 90% after complete discharge
Safety Protection	Over Charge & Over Discharge Protection
Advance Battery Management	Yes
<b>DISPLAY</b>	
LED Status Indicators	Input voltage, Output voltage, Load level, Battery level, Fault, Battery fail, Overload, AC normal
<b>AUDIBLE ALARM</b>	
Battery Mode	Two short tones every 8 seconds
Low Battery	Four short tones every seconds

Overload	Beeping continuously
Fault	Beeping continuously
<b>MANAGEMENT</b>	
USB Communication Port	Included, Software support Windows 95/98/NT/2000/ME/XP/2003/Vista/7/8/10
<b>ENVIRONMENT</b>	
Operating Temperature	0° C - 40° C (32° F ~ 104° F)
Humidity	0-95% (Non-condensing)
Acoustic Noise	<40 db at 1M
<b>PHYSICAL</b>	
Dimension (W*D*H)	343*135*208mm

\* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

**URL :** <https://www.citraweb.com/produk/994/>

**Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email [sales@citraweb.com](mailto:sales@citraweb.com)**